

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
1 July 2004 (01.07.2004)

PCT

(10) International Publication Number  
**WO 2004/055388 A1**

- (51) International Patent Classification<sup>7</sup>: **F15B 13/07**, F16K 31/163, B62D 33/067
- (21) International Application Number: PCT/NL2003/000859
- (22) International Filing Date: 4 December 2003 (04.12.2003)
- (25) Filing Language: Dutch
- (26) Publication Language: English
- (30) Priority Data:  
1022163 13 December 2002 (13.12.2002) NL
- (71) Applicant (for all designated States except US): **AC-TUANT CORPORATION** [US/US]; 6100 North Baker Road, Glendale, WI 53209-3703 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **OUDELAAR, Tone** [NL/NL]; 3, Brederostraat, NL-7576 CA Oldenzaal (NL).
- (74) Agent: **BROOKHUIS, H., J., A.**; Exter Polak & Char-louis B.V., P.O. Box 3241, NL-2280 GE Rijswijk (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HYDRAULIC TILTING DEVICE FOR TILTING THE CAB OF A VEHICLE

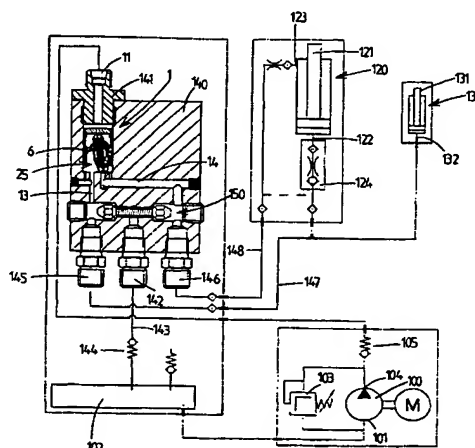

(57) Abstract: The tilting device comprises a double-acting tilting cylinder (120) having a first (122) and a second (123) connection, a reservoir (102) for hydraulic fluid and a pump (100) having one single pumping direction, which pump has a suction port (101) which is in communication with the reservoir and one single delivery port (104) for delivering pressurized hydraulic fluid. The tilting device has a valve (1). The valve (1) also has hydraulic actuating means for actuating the shut-off member (20), which hydraulic actuating means are designed in such a manner that, as a result of the pump (100) supplying hydraulic fluid to the inlet passage (11), the shut-off member is moved into the first position or into the second position, and as a result of this supply then being stopped or reduced and then being restored again, the shut-off member is moved into the second position or first position, respectively.